

MXZ1 Sensor


Safe control sensor



DESCRIPTION

Construction lifter, loading machine etc,
safe limit special situation

OUTLINE DIMENSIONS in millimeters (mm)

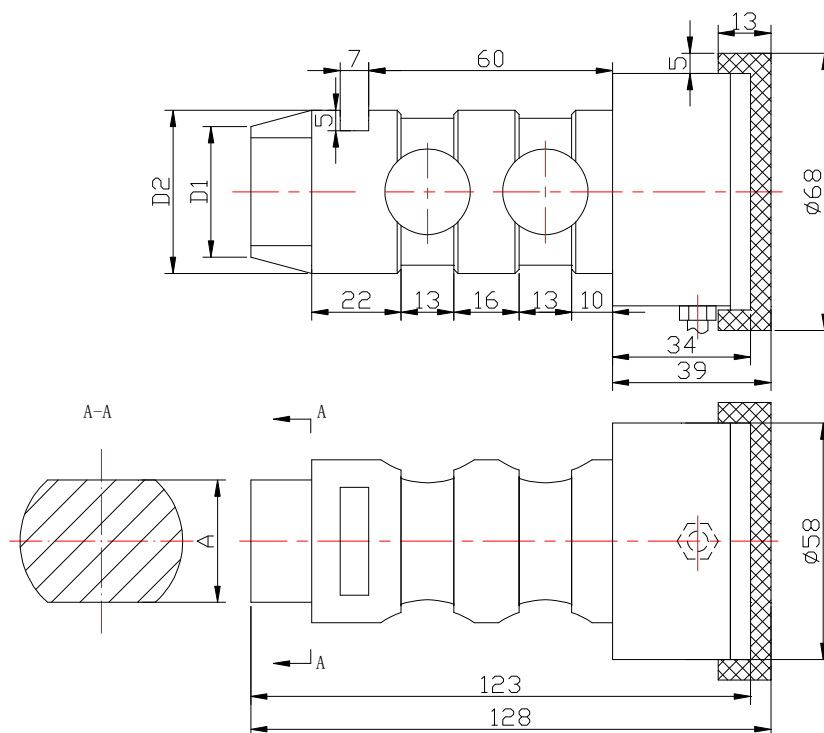


Capacity (t)	Size mm		
	D1	D2	A
3	$\Phi 32$	$\Phi 40$	30
5	$\Phi 42$	$\Phi 50$	36

SPECIFICATIONS

Capacity	t	3, 5
Rated output	mv/v	1.0±0.5% (3t) 0.7±0.5% (5t)
Non-linearity	%F.S	0.03
Hysteresis	%F.S	0.03
Creep in 30 minutes	%F.S	0.03
Zero balance	%F.S	±1
Input resistance	Ω	750±10
Output resistance	Ω	703±2
Insulation resistance	MΩ	≥5000
Excitation voltage	V	10V (maximum 15V) AC/DC
Environmental protection		IP67
Safe overload	%F.S	150
Ultimate overload	%F.S	300
Operating temperature range	℃	-10~+40
Material		Alloy steel
Cable Length	m	4

Wiring Schematic Diagram

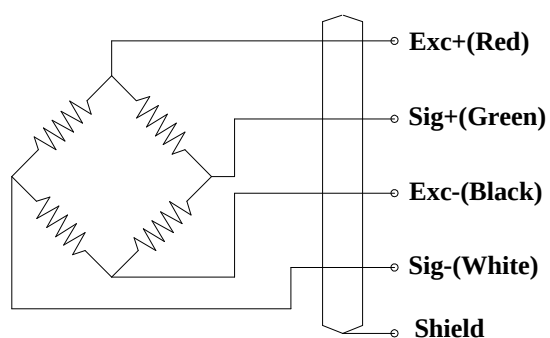

FEATURE

- Capacities 3, 5 t
- Can make load cells in different capacity according to customer's in stalling dimensions
- Internal additive transmitter module
- port metering overload alarm, all kinds of security restrictions occasion

INTERCHANGEABLE PRODUCTS

KELI Model XZN